



ENERG
енергия · ενέργεια




NIBE F1355-43



55 °C

35 °C



A+++

A+++



47 dB



dB

■ 42
■ **42**
■ 42
kW

■ 45
■ **45**
■ 45
kW




2019

811/2013



ENERG

енергия · ενεργεια



NIBE

NIBE F1355-43



A⁺⁺⁺

A⁺⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺

A

B




C

D

E

F

G

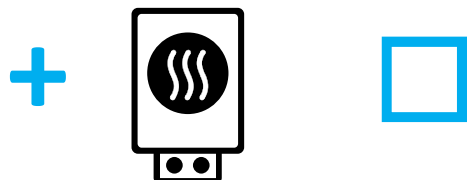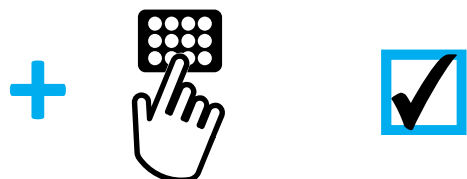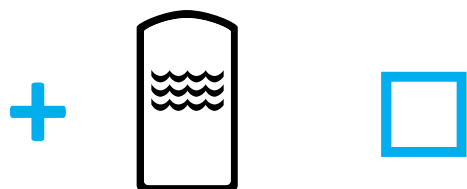

Supplier's name:	NIBE AB		
Model:	NIBE F1355-43		
Temperature application	35	55	°C
Declared load profile for water heating			
Seasonal space heating energy efficiency class, average climate:	A+++	A+++	
Water heating energy efficiency class, average climate:			
Rated heat output, average climate:	45	42	kW
Annual energy consumption for space heating, average climate	18588	21700	kWh
Annual electricity consumption for water heating, average climate			kWh
Seasonal space heating energy efficiency, average climate:	192	152	%
Water heating energy efficiency, average climate:			%
Sound power level LWA indoors	47		dB
Rated heat output, cold climate:	45	42	kW
Rated heat output, warm climate:	45	42	kW
Annual energy consumption for space heating, cold climate	21011	24977	kWh
Annual electricity consumption for water heating, cold climate			kWh
Annual energy consumption for space heating, warm climate	11463	13776	kWh
Annual electricity consumption for water heating, warm climate			kWh
Seasonal space heating energy efficiency, cold climate:	203	158	%
Water heating energy efficiency, cold climate:			%
Seasonal space heating energy efficiency, warm climate:	202	155	%
Water heating energy efficiency, warm climate:			%
Sound power level LWA outdoors	-		dB

Data for package fiche

Controller class	II		
Controller contribution to efficiency	2		%
Seasonal space heating energy efficiency of package, average climate:	194	154	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	205	160	%
Seasonal space heating energy efficiency of package, warm climate:	204	157	%

Model(s):				NIBE F1355-43							
Type of heat source/sink:				Brine/water							
Low-temperature heat pump:				No							
Equipped with supplementary heater:				No							
Heat pump combination heater:				No							
Climate condition:				Average							
Temperature application:				Medium temperature (55 °C)							
Applied standards: EN14825 - EN12102-1											
Rated heat output			Prated	42,0	kW	Seasonal space heating energy efficiency			ηs	152	%
<i>Declared capacity for part load at outdoor temperature Tj</i>						<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>					
Tj = -7 °C			Pdh	36,5	kW	Tj = -7 °C			COPd	3,1	
Tj = +2 °C			Pdh	26,6	kW	Tj = +2 °C			COPd	3,9	
Tj = +7 °C			Pdh	13,3	kW	Tj = +7 °C			COPd	4,7	
Tj = +12 °C			Pdh	7,8	kW	Tj = +12 °C			COPd	5,4	
Tj = biv			Pdh	40,1	kW	Tj = biv			COPd	2,8	
Tj = TOL			Pdh	40,1	kW	Tj = TOL			COPd	2,8	
Tj = -15 °C (if TOL < -20 °C)			Pdh		kW	Tj = -15 °C (if TOL < -20 °C)			COPd		
Bivalent temperature			Tbiv	-10	°C	Operation limit temperature			TOL	-10	°C
Cycling interval capacity for heating			Pcych		kW	Cycling interval efficiency			COPcyc		-
Degradation co-efficient			Cdh	1,00	-	Heating water operating limit			WTOL	65	°C
<i>Power consumption in modes other than active mode</i>						<i>Supplementary heater</i>					
Off mode			POFF	0,008	kW	Rated heat output			Psup	0,0	kW
Thermostat-off mode			Pto	0	kW						
Standby mode			PSB	0,008	kW	Type of energy input			Electric		
Crankcase heater mode			PCK	0,02	kW						
<i>Other items</i>											
Capacity control			Variable			Rated air flow rate, outdoors					m³/h
Sound power level, indoors/outdoors			LWA	47/-	dB	Rated water flow rate, indoor heat exchanger					m³/h
Annual energy consumption			QHE	21700	kWh	Rated brine or water flow rate, outdoor heat exchanger				5,92	m³/h
<i>For heat pump combination heater:</i>											
Declared load profile						Water heating energy efficiency			ηwh		%
Daily electricity consumption			Qelec		kWh	Daily fuel consumption			Qfuel		kWh
Annual electricity consumption			AEC		kWh	Annual fuel consumption			AFC		GJ
Approved by:											
Contact details			© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								